


RFID UHF sticker 902-928 MHz made of foam, read range 2-4.5 m Tag-MR6P-6025

SKU: Tag-MR6P-6025 | EAN: 5906935200797

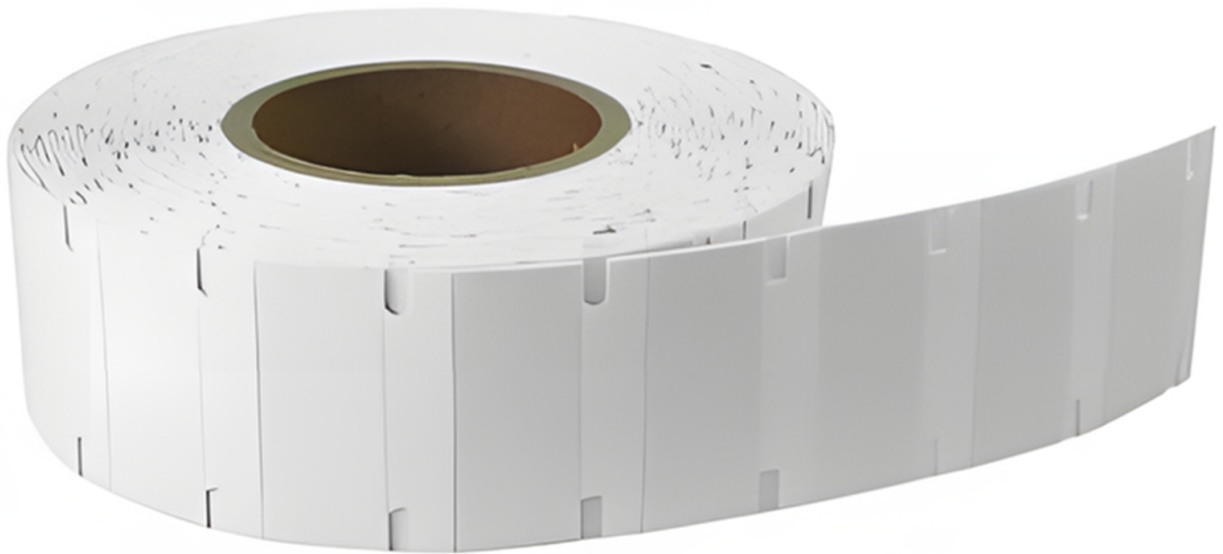

Operating frequency: 902-928 MHz

Material: foam

Read range: up to 2.8 m on metal, up to 1.4 m off metal (handheld reader), up to 4.5 m (stationary reader)

Chip: NXP UCODE 8 (EPC 128 bit, TID 96 bit)

RFID UHF sticker 902-928 MHz made of foam, read range 2-4.5 m Tag-MR6P-6025

Model	Tag-MR6P-6025	Color	white
Material	foam	Frequency of operation	902-928 MHz
Reading distance	Up to 2.8m on metal, up to 1.4m outside metal (handheld reader), up to 4.5m (stationary reader)	IC type	Ucode-8
Memory	EPC 128 bits, TID 96 bits	Write cycles	100,000 times
Data storage	up to 50 years	Recommended printer	Zebra R110Xi4/Postek TX3R/SATO CL4NX
Dimensions of the device	60 x 25 x 1 mm	Weight	45 g
Operating temperature	-20°C to +85°C	Storage temperature	-20°C to +85°C
Protection class	IP57	Certificates	Approved range, Approved RoHS, Approved CE