


UHF RFID tag 865-868 MHz as an M16 mounting screw, read range 120-200 cm Tag-H3-M16

SKU: Tag-H3-M16 | EAN: 5906935200858

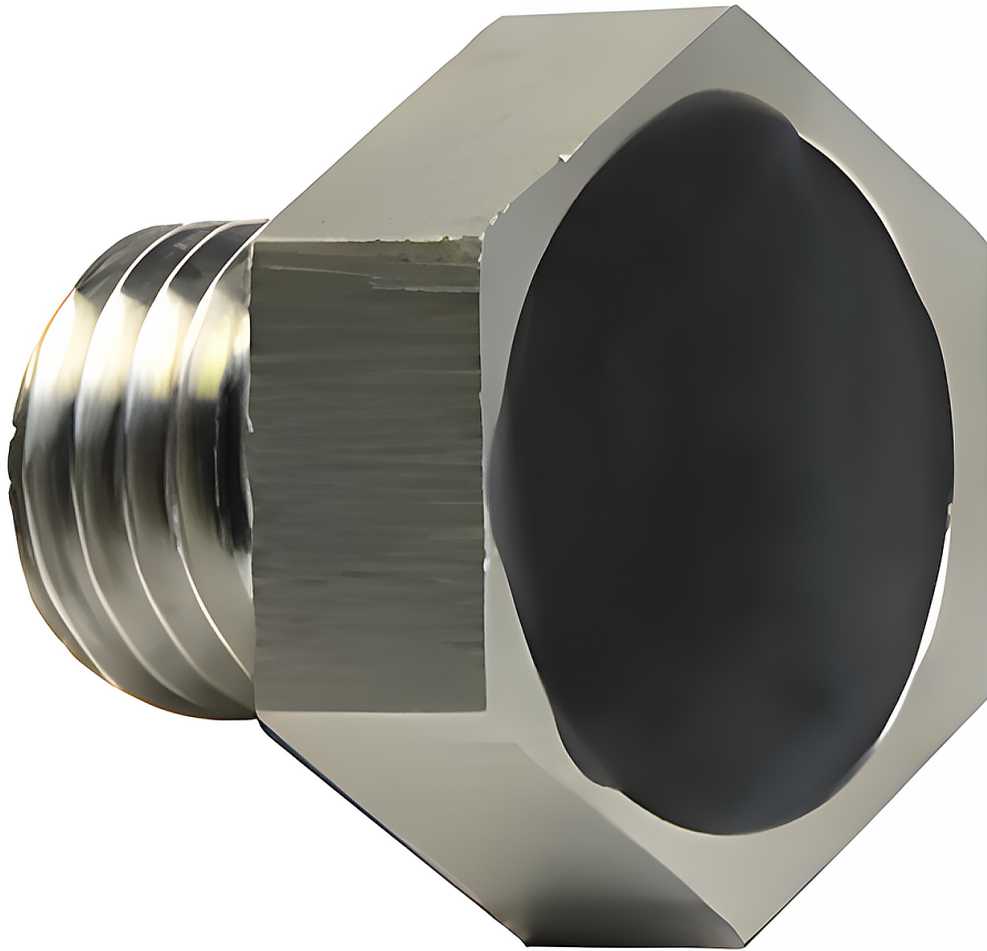

Operating frequency: EU 865-868 MHz, US 902-928 MHz

Material: steel

Reading distance: Up to 120 cm (handheld reader), up to 200 cm (stationary reader)

Color: silver gray

UHF RFID tag 865-868 MHz as an M16 mounting screw, read range 120-200 cm Tag-H3-M16

Model	Tag-H3-M16	Color	silver gray
Material	steel	Frequency of operation	EU 865-868 MHz, US 902-928 MHz
Reading distance	Up to 120 cm (handheld reader), up to 200 cm (stationary reader)	IC type	Alien Higgs-3
Memory	EPC 96 bits (up to 480 bits), USER 512 bits, TID 64 bits	Write cycles	100,000 times
Data storage	up to 50 years	Dimensions of the device	M16 screw, 16 x 24 mm
Weight	250 g	Operating temperature	-40°C to +100°C
Storage temperature	-40°C to +150°C	Protection class	IP68
Certificates	Approved range, Approved RoHS, Approved CE		