


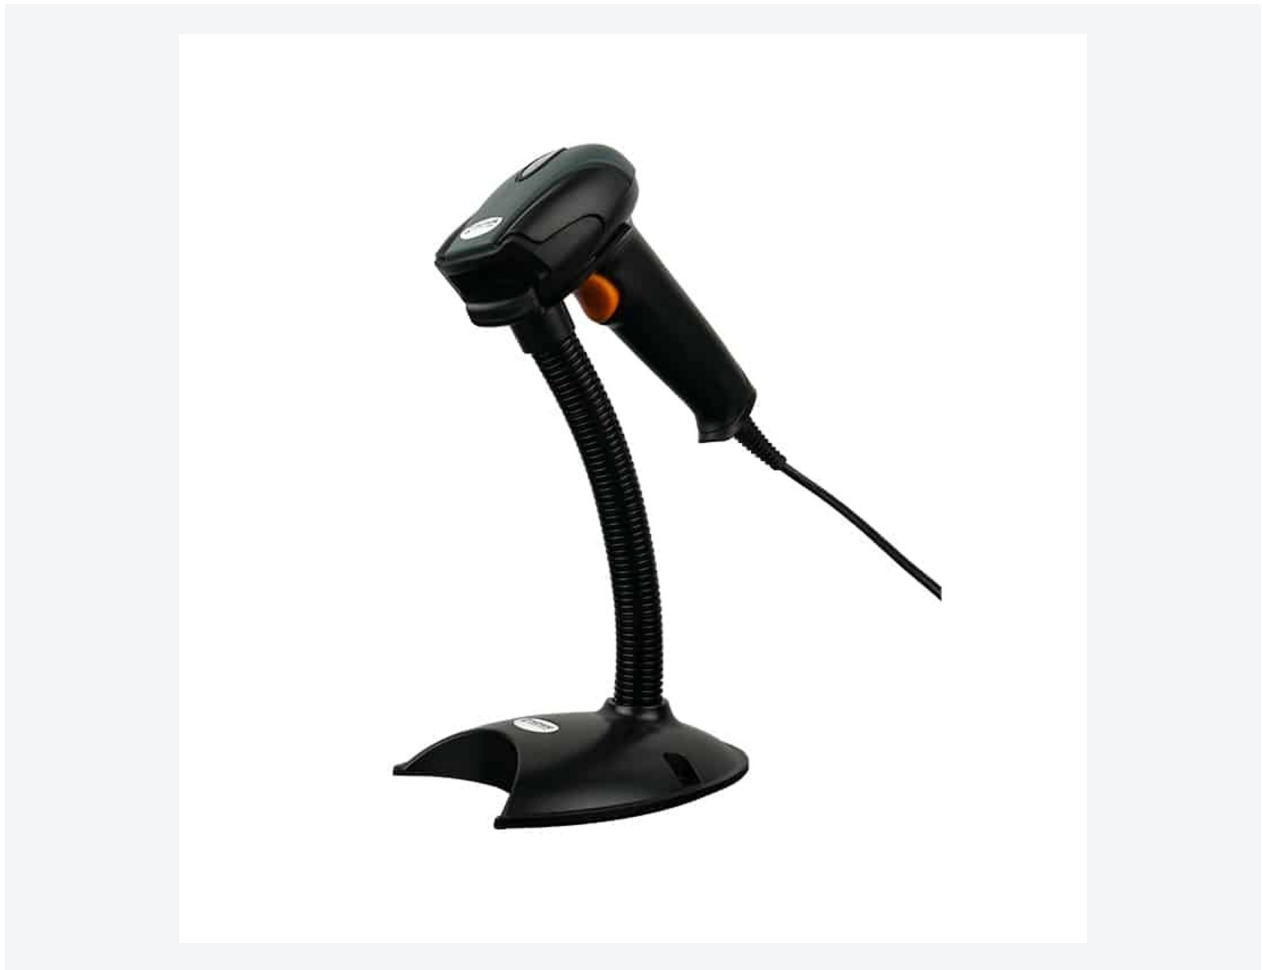

Type of scanned codes: 1D barcodes (laser)

Scanning mode: manual (trigger button) / automatic (hands-free with cradle)


Scanning speed: 200 scans per second

Available interfaces: USB, USB Virtual COM, RS232

Programmable prefix/suffix: yes (including function keys F11, F9, F7, etc.)

Protection level: IP54

Set includes: scanner, dedicated cradle, USB cable, user manual

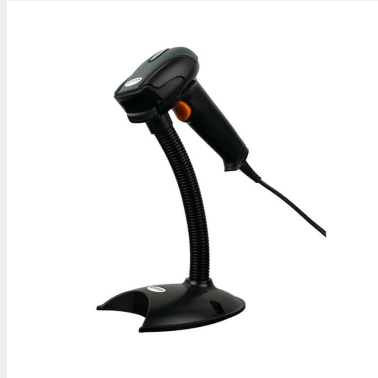

Model	HD29A
EAN	5905669434010
Material of workmanship	ABS + PC
Source of light	Laser 650nm
Power consumption	85 mA
interface	USB, RS232
Cable length	200 cm
Level of security	IP54
Device dimensions	65 x 165 x 90 mm
Stand dimensions	120 x 150 x 240 mm
Size of the package	220 x 130 x 90 mm
Device weight	200 g
Weight with packaging	350 g
Working temperature	0 à 45°C
Storage temperature	-40 à 60°C
Working humidity	5 à 90%
Storage humidity	5 à 90%

Readable 1D codes	UPC/EAN, UPC/EAN z dodatkami, UCC/EAN 128, Code 39, Code 39 Full ASCII, Code 39 trioptique, Code 128, Code 128 Full ASCII, Codabar, Entrelacé 2 z 5 (ITF), Discrete 2 z 5, Code 93, MSI, Code 11, RSS warianty, Chinese 2 z 5, MSI/Plessey UK/Plessey UCC/EAN 128 chinese code IATA, GS1 DataBar RSS
Scanning engine	Laser
Codes being read	1D (line)
Scanning method	automatically (after approaching the code), manually (push button)
Built-in memory	No
Docking station	No
Long Range	No
Reader stand	Yes
Reading codes from the LCD screen	No
USB Receiver	No
Scanning speed	200 scans/second
Confirmation of scanning	light signal, sound signal