



Type of verification: fingerprint, password, RFID card/key fob 125 kHz

Display: 2,4 inches, TFT LCD


RFID technology: yes

Operating frequency: 125 kHz

Max. number of employees in the base: 1000

Communication: USB

Power supply: 12V

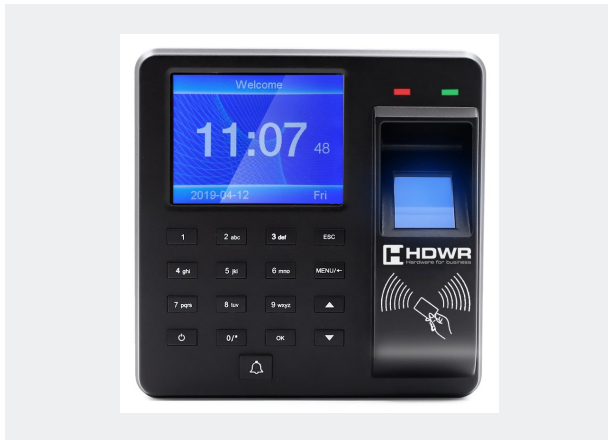

Model	CTR10
EAN	5907614662400
Material	ABS+PC
Frequency of compatible RFID key fobs and cards	125 kHz
Type of verification	fingerprint, password, RFID card/key fob 125 kHz
Max. number of employees in the database	1000
Max. number of administrators in the database	10
Max. number of passwords in the database	1000
Max. number of fingerprints in the database	1000
Max. log capacity in the database	100 000
Number of keys	17
Display	2.4 inches, TFT LCD
Supported Drives	USB 8GB FAT32
Interface	USB

Access Control	Relay Output
Magnetic Input	One-way Output
Bell/Alarm	Local Transmission or Relay Output
Wiegand Input/Output	WG26/WG34
Working voltage	DC12V
Protection class	IP54
Error rate	1/1 000 000
Operating temperature	0 ~ 60°C
Operating humidity	20 ~ 80%
Device Weight	350 g
Weight with packaging	500 g
Package dimensions	145mm x 140mm x 45mm
Dimensions of the device	106mm x 106mm x 34mm