


RFID tag stickers, frequency 902-928 MHz, Tag-MR6P-6025, set of 30 pieces

SKU: Tag-MR6P-6025-30 | EAN: 5906935200919

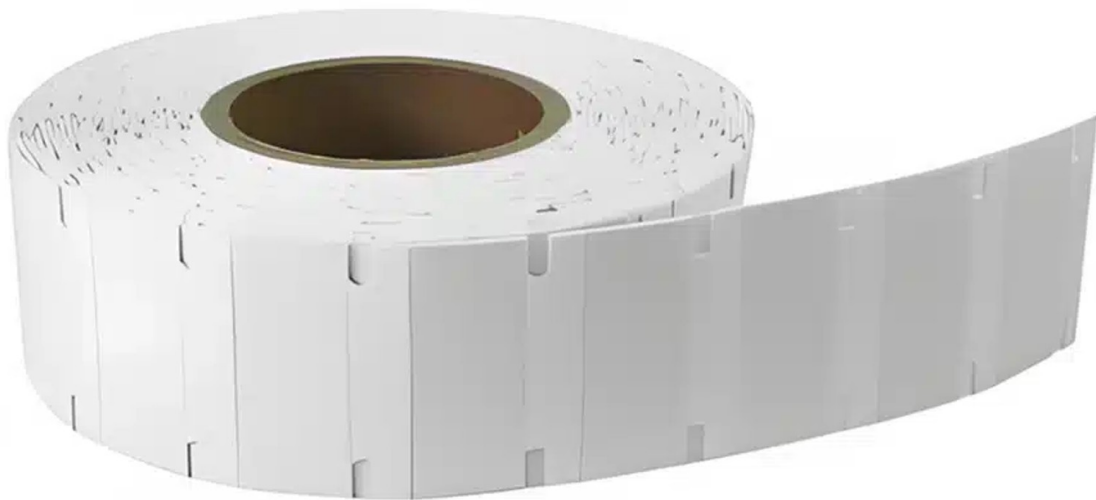

Operating frequency: 902-928 MHz

Material: foam

Read range: up to 2.8 m on metal, up to 1.4 m off metal (handheld reader), up to 4.5 m (stationary reader)

Chip: NXP UCODE 8 (EPC 128 bit, TID 96 bit)

RFID tag stickers, frequency 902-928 MHz, Tag-MR6P-6025, set of 30 pieces

Model	Tag-MR6P-6025-30	Color	white
Material	foam	Operating frequency	902-928MHz
Reading distance	Up to 2.8m on metal, up to 1.4m outside metal (handheld reader), up to 4.5m (stationary reader)	IC type	Ucode-8
Memory	EPC 128 bits, TID 96 bits	Write cycles	100,000 times
Data storage	up to 50 years	Recommended printer	Zebra R110Xi4/Postek TX3R/SATO CL4NX
Dimensions	60 x 25 x 1 mm	Weight	45 g
Working temperature	-20°C to +85°C	Storage temperature	-20°C to +85°C
IP degree of protection	IP57	Certifications	Approved range, Approved RoHS, Approved CE